


	
Dynamic loading	Soft-Close


DESCRIPTION

- Maximum load: 40KG
- Lifespan: 80,000 times
- Drawer height: 84mm
- Drawer length: 270, 300, 350, 400, 450, 500, 550mm
- Applicable plate thickness: 16mm
- Main materials: cold rolled sheet, galvanized sheet
- Finish: Matt Black, White Silver, Iron Grey, Light Grey
- 2D adjustment: $\pm 1.5\text{mm}$ up and down, $\pm 1.5\text{mm}$ left and right

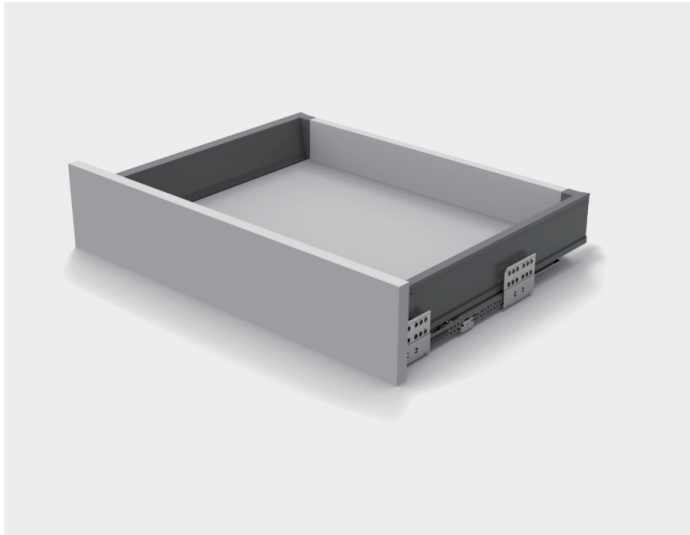

Product Parameters

Components view

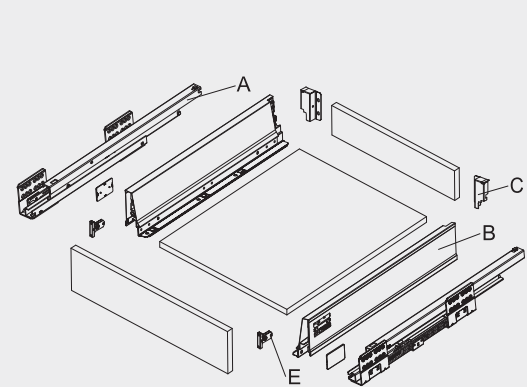

A:

Drawer slide L/R Material: SECC Loading capacity: 40kg

Specifications/ NL: 270/ 300/ 350/ 400/ 450/ 500/ 550mm

B:

Side wall L/R

Material: cold-rolled steel Specification/ NL: 270/ 300/ 350/ 400/ 450/ 500/ 550mm Surface treatment: matt black, white silver, iron grey, light grey Surface nish: Black, White, Dark gray, Light gray

C:


Back panel connector L/R Material: cold-rolled steel Surface treatment: matt black, white silver, iron grey, light grey Surface nish: Black, White, Dark gray, Light gray

E: FRONT CONNECTOR

Material: SECC + plastic


Clip on front connector Material: SECC + plastic

S

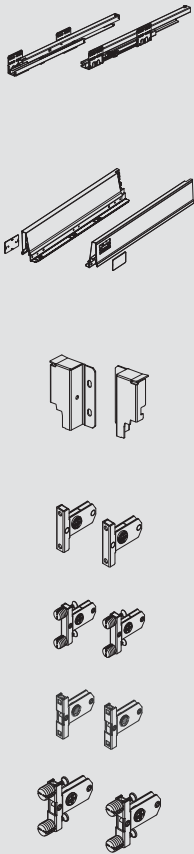


Mounting


Cabinet space required
Cabinet space requirements

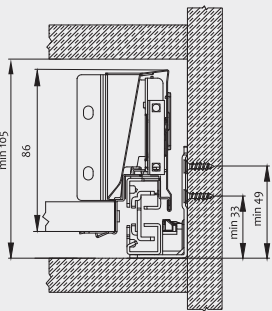


Front panel installation dimensions
Front connector panel installation dimensions

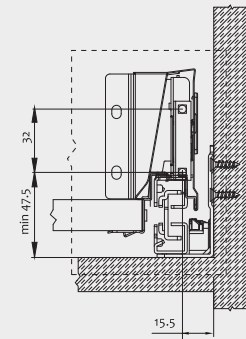



Panel drilling size
Front panel drilling dimensions

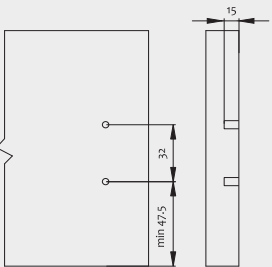


Backplane installation dimensions
Back panel installation dimensions

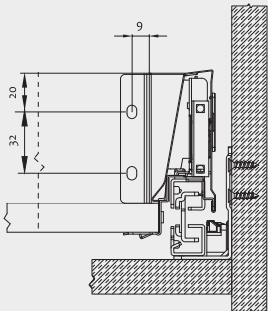

DRAWER SLIDE INSTALLATION DIMENSIONS

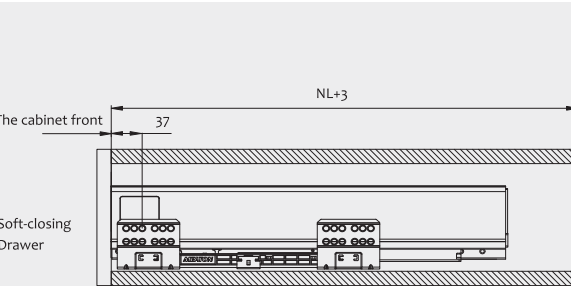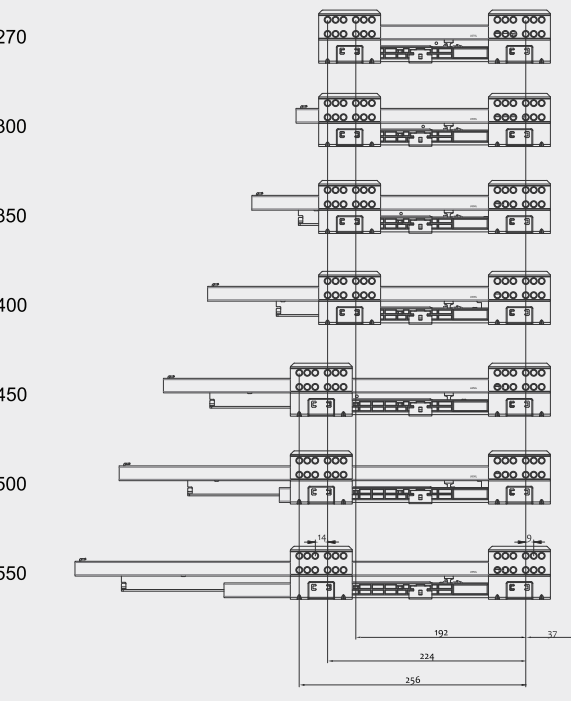

CUTTING DIMENSIONS FOR BACK PANEL

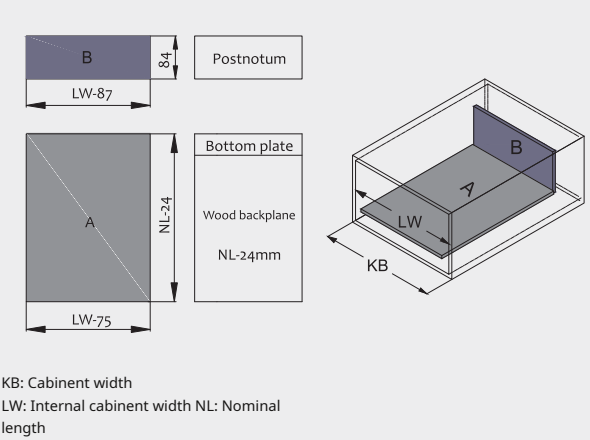

KB: Cabinet width
LW: Internal cabinet width NL: Nominal length

SPACE REQUIRED

NOMINAL LENGTH(MM)

